

PVT Range - Portable Fan with Flexi Duct

Key Features

This portable fan is highly efficient, low noise, easy to move and convenient to use in light industrial applications e.g. where a person is busy working on a project. The ducting can be directed away from the source or where the air is needed.




Fan supplied with 5m duct complete.

Construction

- The PVT range is constructed from mild steel with a power coated finish.
- Supplied with a safety guard and handle for easy movement.
- The PVT fan stands on rubber mounting feet, which minimises vibration and prevents the fan from moving around.
- Fan supplied in 220V - 240VAC.

Performance Curve

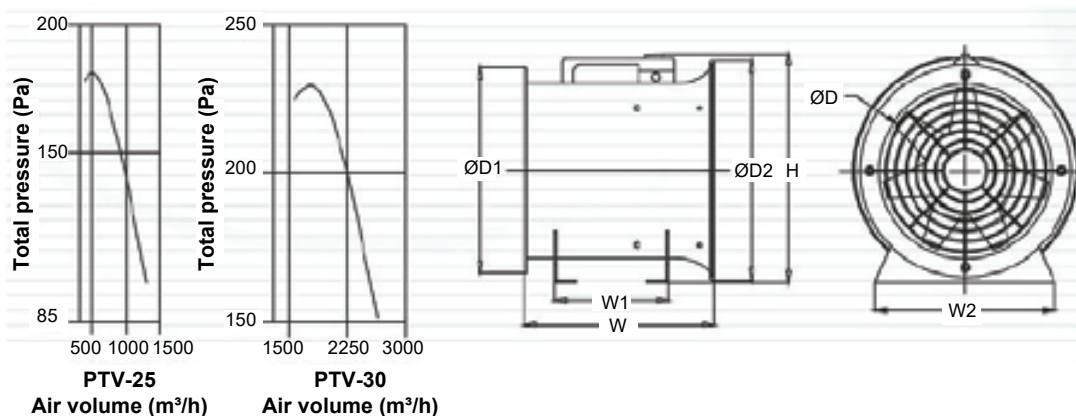

Specifications

Model	Size (mm)	Power (W)	RPM (r/min)	Air volume (m³/h)	Pressure (pa)	Noise dB(A)	D (mm)	D1 (mm)	D2 (mm)	W (mm)	W1 (mm)	W2 (mm)	H (mm)
PVT-25	250	180	2800	1980	250	70	240	266	290	300	190	259	355
PVT-30	300	380	2800	3420	350	80	285	326	350	325	220	300	410
PVT-40	400	1100	2800	7680	520	90	400	434	450	400	285	412	484